



Leica L-Log

Reference Manual V1.9

June, 2026

Contents

1	Document Version History	03
2	Purpose of This Document	03
3	Applicable Cameras and Native ISO Values	03
4	L-Log Curve Characteristics	03
4.1	LSR-to-L-Log Conversion	05
4.2	L-Log-to-LSR Conversion	06
4.3	Mapping of LSR to IRE, DV and EV	06
5	Colorimetric Characteristics	08
5.1	Colorimetric Conversions	08
6	Camera Settings for Recording L-Log	09
7	Recording L-Log Externally	09
8	Exposing L-Log	10
8.1	Exposing for Easiest LUT Application	10
8.2	Exposing for Best Image Quality	11
9	Editing L-Log Footage	12

List of Figures

1	Applicable Cameras	03
2	Extended L-Log Curve	04
3	L-Log Curve	05
4	Relationship Between EV and 10 Bit DV	07
5	Relationship Between EV and 12 Bit DV	07
6	Comparison of Color Spaces	08
7	Gray Card Scene	11
8	LUT Applied Without Correction	11
9	LUT Applied Before Correction	11
10	LUT Applied After Correction	12
11	Levels Interpretation Comparison	12

List of Tables

1	LSR Mapped to IRE, DV and EV	06
2	L-Log Clipping Values	06
3	L-Log Color Space Properties	08

1 Document Version History

Version	Date	Comment
1.0	January 11, 2021	Initial revision
1.1	May 5, 2022	12 bit and RAW video info added; clipping values added; general improvements
1.2	October 28, 2022	Info on L-Log exposure added
1.3	February 8, 2023	Hint regarding levels interpretation added
1.4	September 14, 2023	Q3 data and explanation on higher ISO value in L-Log added
1.5	February 2, 2024	SL3 data added
1.6	October 7, 2024	SL3-S data added; list of compatible RAW recorders updated
1.7	March 18, 2025	Section on supported cameras and native ISO values added; Fixed error in color space coordinate visualization in Figure 6
1.8	November 10, 2025	Q3 Monochrom data added
1.9	June 25, 2026	SL3-P data added

2 Purpose of This Document

This reference manual is meant as a technical guideline for dealing with 10 bit and 12 bit L-Log footage. While the main reason to record in log is to maximize dynamic range and latitude in post production, it can be important for certain applications to be able to match footage from different sources in a defined manner. Requirements for this matching operation are the definition of the log curve and the color space used for recording, both of which are provided in this document. Additionally, [section 6](#), [7](#), [8](#) and [9](#) include practical guidelines and tips for working with L-Log footage successfully.

3 Applicable Cameras and Native ISO Values

The L-Log Reference Manual is applicable to the cameras listed in [Figure 1](#).

Release	Camera	Native ISO value(s) in L-Log		Comment
2026	Leica SL3-P	ISO 200 (400)	800 (1600)	DR Boost OFF (ON)
2025	Leica Q3 Monochrom	ISO 800	ISO 2500	
2025	Leica SL3-S	ISO 400	ISO 2500	
2024	Leica SL3	ISO 200	ISO 640	
2024	Leica Q3 43	ISO 200	ISO 640	
2023	Leica Q3	ISO 200	ISO 640	
2020	Leica SL2-S	ISO 400	ISO 2500	
2019	Leica SL2	ISO 400	ISO 2500	

Figure 1: Applicable cameras with their native ISO values.

4 L-Log Curve Characteristics

The L-Log gamma curve is plotted in [Figure 2](#). Linear scene reflection (LSR) values are mapped to L-Log values following the calculation specification described in [subsection 4.1](#).

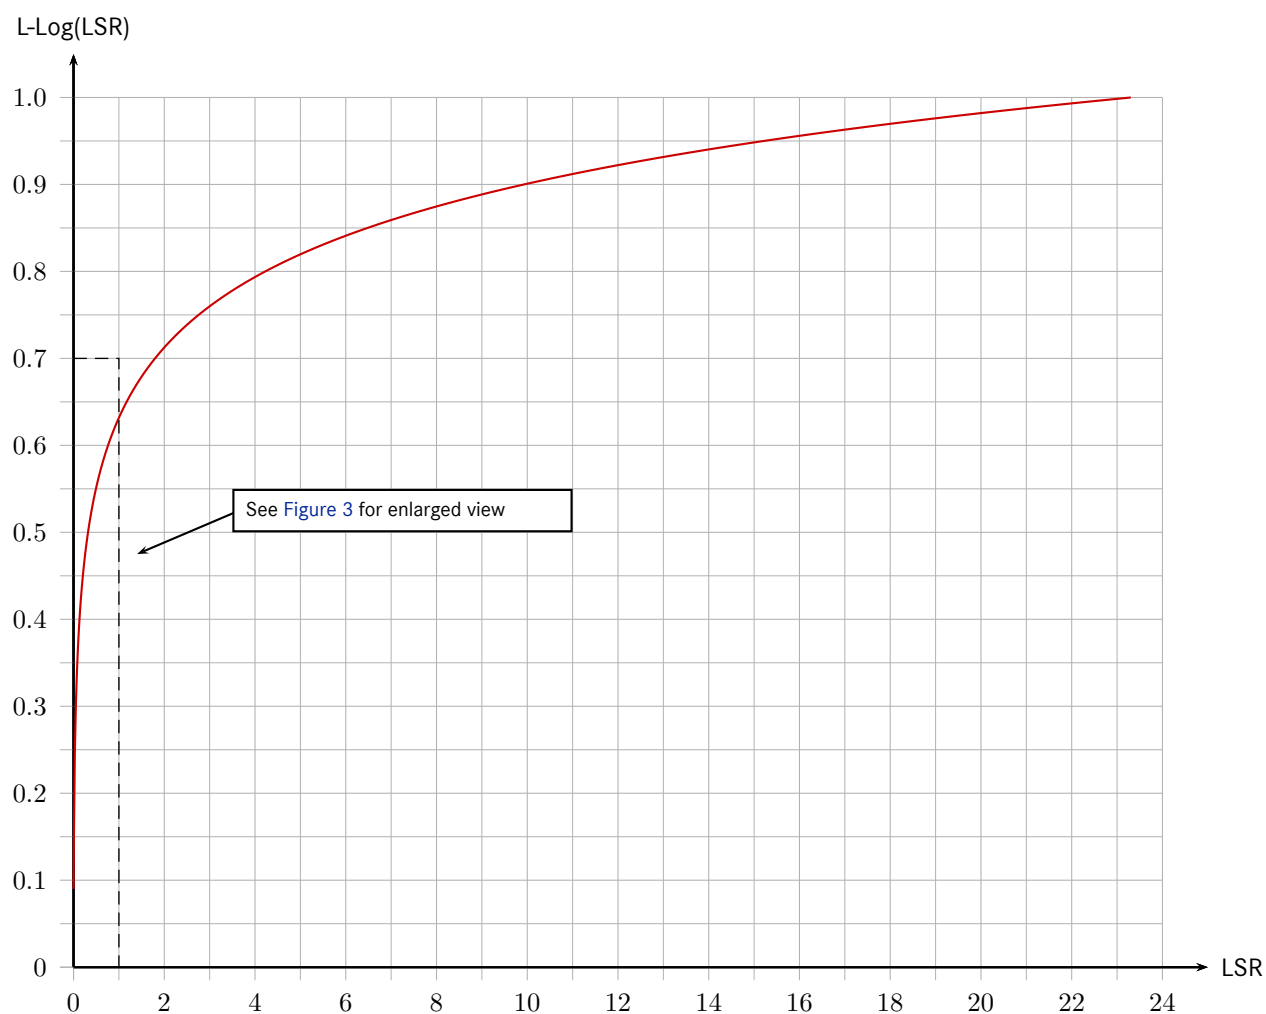


Figure 2: Extended L-Log curve showing when L-Log(LSR) value approaches 1.0.

[Figure 3](#) shows the L-Log gamma curve plotted until it reaches an LSR value of one.

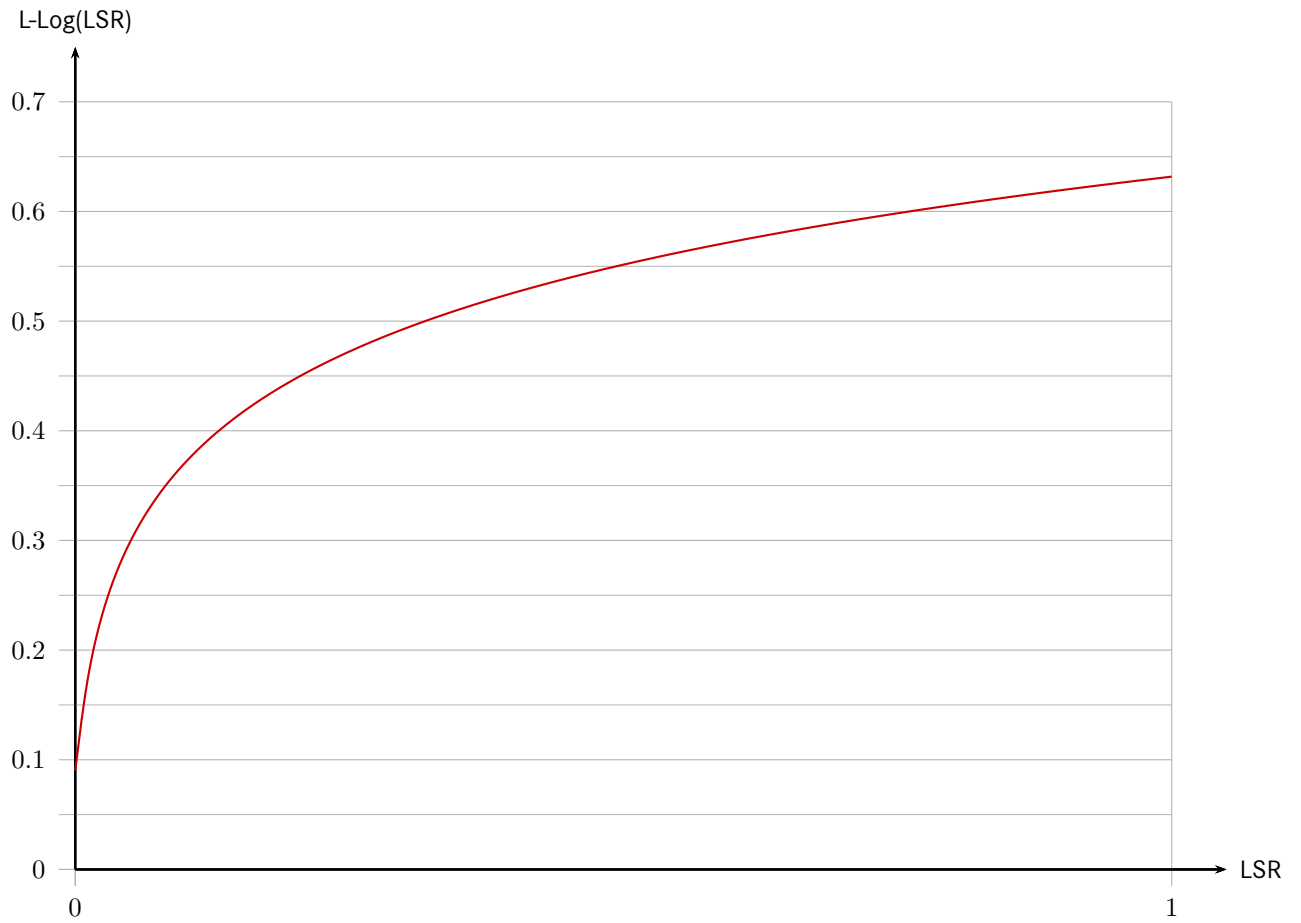


Figure 3: L-Log curve plotted until an LSR value of one is reached.

4.1 LSR-to-L-Log Conversion

For LSR-to-L-Log conversion the following calculation specification is given.

$$\text{L-Log}(\text{LSR}) = \begin{cases} a \cdot \text{LSR} + b & \text{for } \text{LSR} \leq 0.006 \\ c \cdot \log(d \cdot \text{LSR} + e) + f & \text{else} \end{cases} \quad (1)$$

where

$$a = 8$$

$$b = 0.09$$

$$c = 0.27$$

$$d = 1.3$$

$$e = 0.0115$$

$$f = 0.6$$

4.2 L-Log-to-LSR Conversion

For L-Log-to-LSR conversion the following calculation specification is given.

$$\text{LSR} = \begin{cases} \frac{\text{L-Log}(\text{LSR}) - b}{a} & \text{for } \text{L-Log}(\text{LSR}) \leq 0.1380 \\ \frac{10^{\left(\frac{\text{L-Log}(\text{LSR}) - f}{c}\right) - e}}{d} & \text{else} \end{cases} \quad (2)$$

where

$$a = 8$$

$$b = 0.09$$

$$c = 0.27$$

$$d = 1.3$$

$$e = 0.0115$$

$$f = 0.6$$

4.3 Mapping of LSR to IRE, DV and EV

Typical LSR values and their equivalent in IRE¹, 10 bit and 12 bit digital values (DV) as well as exposure values are given in [Table 1](#) along with a practical meaning of each entry in the table.

[Figure 4](#) shows a plot of the relationship between digital and exposure values.

LSR	[%]	IRE [%]	L-Log Digital Value		Exposure Value	Practical Meaning
			10 bit	12 bit		
0.00	0	3	92	369	-8.0	Black Level
0.02	2	18	220	880	-3.1	2% Black
0.18	18	44	445	1782	0.0	Middle Gray
0.90	90	65	634	2537	2.3	90% White
4.07	407	86	814	3258	4.5	Q3, SL3, SL3-P (DR Boost OFF) White Limit
5.59	559	90	852	3410	4.96	SL (Typ 601) White Limit
8.15	815	95	897	3590	5.5	SL2, SL2-S, SL3-S, SL3-P (DR Boost ON) White Limit
23.30	2330	109	1023	4095	7.0	L-Log White Limit

Table 1: Typical LSR values and their equivalents in IRE, L-Log digital values and exposure values.

L-Log is defined to offer a maximum dynamic range of 15 stops (as illustrated in [Figure 4](#) and [Figure 5](#)). The maximum dynamic range each camera model can achieve is reflected in different white clipping limits. For reference, these values are listed in [Table 2](#) for each camera capable of recording L-Log footage. IRE is given as an additional reference point. It is stated in a codec-dependent manner, because h.264 and h.265 use full data range while Apple ProRes uses video levels.

Camera	Digital Value		IRE [%]	
	10 bit	12 bit	h.264, h.265	ProRes
SL3-S, SL3-P (DR Boost ON)	897	3590	95	88
SL3-P (DR Boost OFF)	814	3258	86	78
Q3, SL3	814	–	86	78
SL2-S	897	3590	95	–
SL2	897	–	95	–
SL (Typ 601)	852	–	90	–

Table 2: L-Log clipping values for different cameras.

¹See [https://en.wikipedia.org/wiki/IRE_\(unit\)](https://en.wikipedia.org/wiki/IRE_(unit))

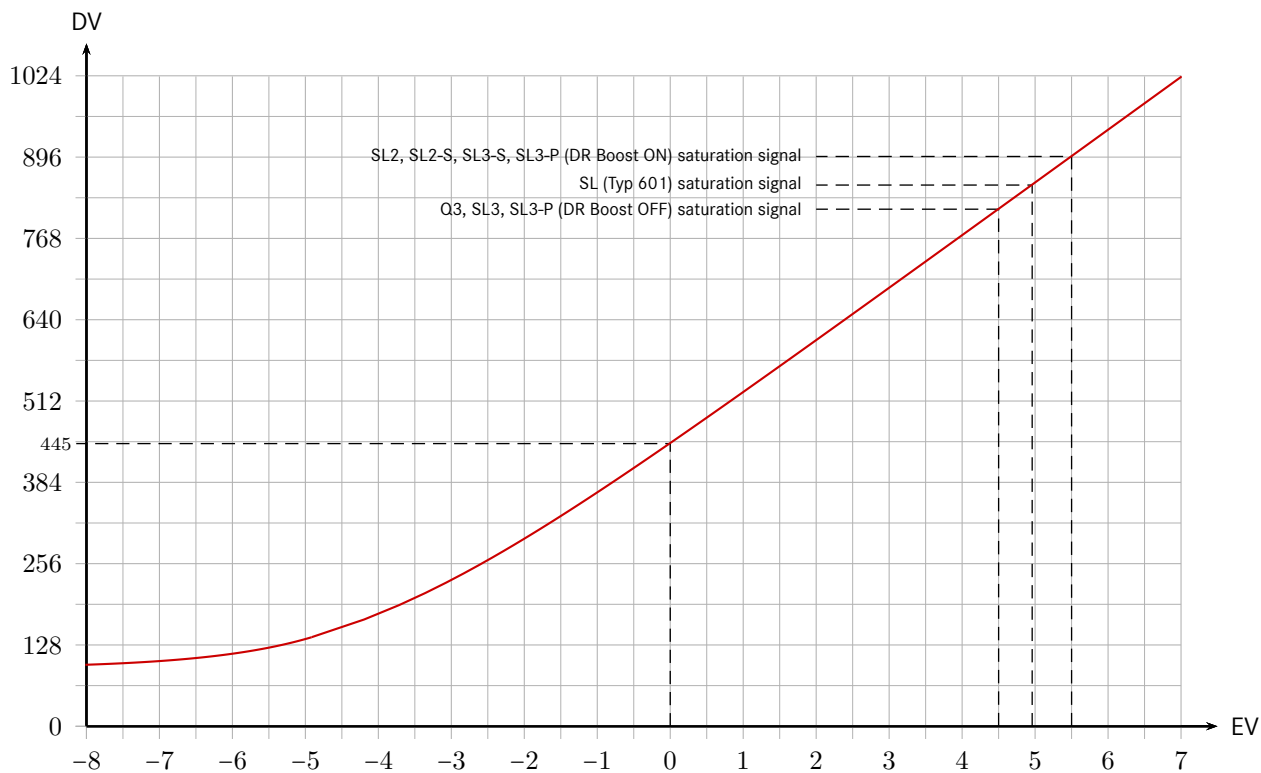


Figure 4: Relationship between linear scene reflection in exposure values and corresponding 10 bit digital values of the L-Log curve. The value of 0 EV corresponds to 18% input reflection.

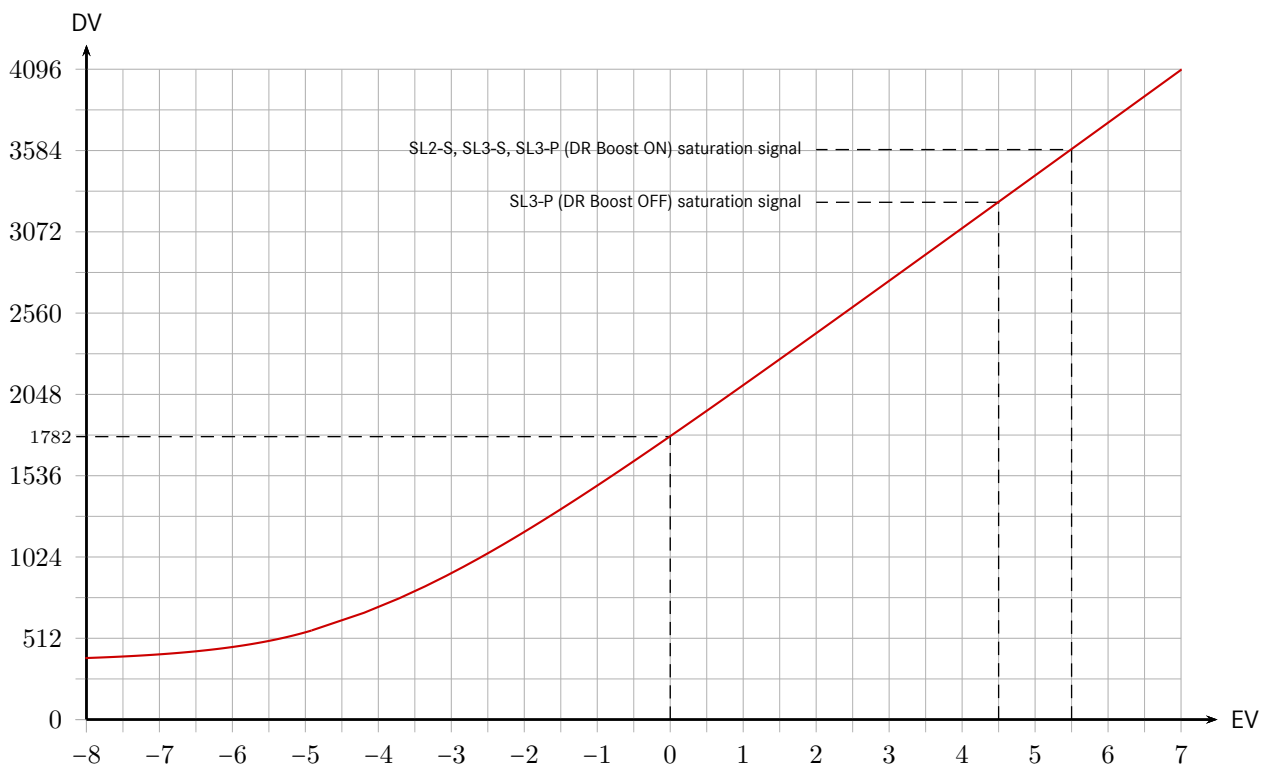


Figure 5: Relationship between linear scene reflection in exposure values and corresponding 12 bit digital values of the L-Log curve. The value of 0 EV corresponds to 18% input reflection.

5 Colorimetric Characteristics

The latest Leica cameras capable of L-Log recording use the ITU-R BT.2020 color space, while the SL (Typ 601) uses the ITU-R BT.709 color space. The properties of both spaces are shown in [Table 3](#).

[Figure 6](#) shows a comparison of common color spaces on a CIE 1931 xy chromaticity diagram.

Camera	Color Space	White Point		Primary Colors					
		x_W	y_W	x_R	y_R	x_G	y_G	x_B	y_B
All	ITU-R BT.2020	0.3127	0.3290	0.708	0.292	0.170	0.797	0.131	0.046
SL (Typ 601)	ITU-R BT.709	0.3127	0.3290	0.640	0.330	0.300	0.600	0.150	0.060

Table 3: L-Log color space properties.

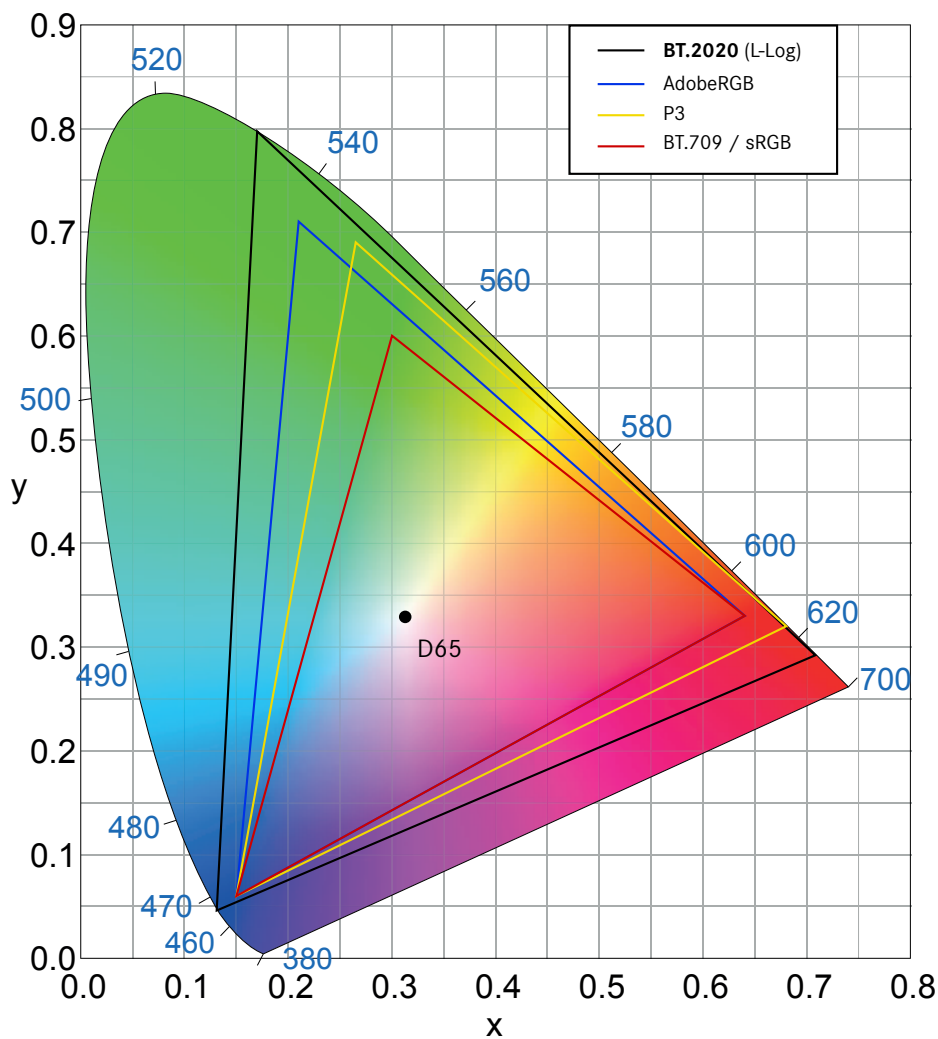


Figure 6: Comparison of color spaces.

5.1 Colorimetric Conversions

Converting from BT.2020 to XYZ color space is defined as:

$$\text{BT.2020 to XYZ} = \begin{bmatrix} 0.6370 & 0.1446 & 0.1689 \\ 0.2627 & 0.6780 & 0.0593 \\ 0.0000 & 0.0281 & 1.0610 \end{bmatrix}$$

The reverse conversion is defined as follows:

$$\text{XYZ to BT.2020} = \begin{bmatrix} 1.7167 & -0.3557 & -0.2534 \\ -0.6667 & 1.6165 & 0.0158 \\ 0.0176 & -0.0428 & 0.9421 \end{bmatrix}$$

Additional colorimetric conversions (e.g. between BT.2020 and BT.709) can be found in relevant literature.

6 Camera Settings for Recording L-Log

In order to record L-Log footage the appropriate Video Gamma setting must be enabled in the Settings menu:

SL3-P **Video Profiles ► Profile [1–5] ► Settings ► Video Gamma ► select L-Log**

SL3-S }
SL3 } **Video Profiles ► Profile [1–5] ► Settings ► select L-Log** in lower left corner

Q3 }
SL2-S }
SL2 } **Video Settings ► Video Gamma ► select L-Log**

SL (Typ 601): **Video Settings ► Video Gamma L-Log ► select On**

Some cameras come with an option to output a viewing LUT via HDMI. This feature can be used when a monitor is connected to the HDMI port, but should be avoided when the HDMI signal is being recorded. In order to record a clean L-Log signal externally the following options should **not** be set to **HDMI**:

SL3-P }
SL3-S }
SL3 } **Log Settings ► L-Log Settings ► Output**

Q3 }
SL2-S }
SL2 } **Video Settings ► Video Gamma ► Settings ► L-Log ► Output**

In case no **LUT Profile** has been set, the **Output** option can be ignored.

RAW Video: some cameras can record L-Log as 12 bit RAW footage via an external recorder. To enable this feature make the appropriate settings selection and connect a compatible recorder via HDMI (see [section 7](#)).

SL3-P: **Video Profiles ► Profile [1–5] ► Settings ► Quality ► select a RAW** format from the list

SL3-S: **Video Profiles ► Profile [1–5] ► select RAW** as **Format** (upper left chip)

SL2-S: **Video Format / Resolution ► select HDMI RAW**

7 Recording L-Log Externally

In order to record an L-Log signal via HDMI the camera must be set to output L-Log, which is ensured by selecting the appropriate gamma setting (as described in [section 6](#)). The recorder can be set to display the signal “as is”, showing the “flat” appearance of the log footage. Or it can be set to apply a viewing LUT to give the camera operator a better idea of the final result (i.e. in ITU-R BT.709 color space and gamma). Suitable LUTs for this purpose can be uploaded to the recorder.

It should be noted that LUTs can also be “baked in”, effectively recording the footage in the final look that the LUT provides.

In most cases this should be avoided, because it limits the advantages of recording log footage and therefore represents a rather impractical workflow.

RAW Video: an externally connected video recorder must be set to accept a RAW video input via HDMI. Currently, the following recorders are supported:

Manufacturer	Model	Codec
Atomos	Ninja	Apple ProRes RAW Apple ProRes RAW HQ
	Ninja TX	
	Ninja V	
	Ninja V+	
	Ninja Ultra	
	Shogun Ultra	
	Shogun Connect	
Blackmagic Design	Video Assist 12G HDR	Blackmagic RAW (BRAW)

Camera support for external RAW video recording is as follows:

Camera	Resolution	Frame Rate	Sensor Format
SL3-P	8K OG (8128×5418)	23.976	35 mm (LF)
	C8K (8128×4302)	23.976, 25, 29.97	35 mm (LF)
	7.2K 3:2 (7232×4820)	25, 29.97	35 mm (LF)
	4.8K 4:3 (4752×3568)	23.976, 25, 29.97, 50, 59.94	APS-C (S35)
SL3-S	6K (5888×3312)	23.976, 25, 29.97	35 mm (LF)
	C4K (4128×2176)	23.976, 25, 29.97, 50, 59.94	APS-C (S35)
	3.5K 4:3 (3536×2656)	23.976, 25, 29.97, 50	APS-C (S35)
SL2-S	C4K (4128×2176)	23.976, 25, 29.97, 50, 59.94	APS-C (S35)

Hints for recording with Atomos recorders:

- Please note that RAW recording on the SL3-P is only supported by the newest Atomos recorders (Ninja TX series).
- Matching the camera signal in the “CAMERA OUTPUT” section on the “Input” tab of the recorder is only required for in-recorder HDR processing. For typical workflows “Log/HDR” can remain off.
- When a RAW video signal is detected by the recorder the camera output parameters are detected automatically.

8 Exposing L-Log

There are two approaches to exposing L-Log:

Easiest LUT application: this is the exposure that L-Log LUTs are designed for.

Best image quality (recommended): this is the exposure that ensures that the best image quality and dynamic range are achieved, but it requires exposure correction in post if an L-Log LUT is intended to be used.

The following subsections describe each approach in more detail.

8.1 Exposing for Easiest LUT Application

Since L-Log is designed to reproduce middle gray (18% reflectivity) at 44% IRE, it is important to hit this exposure relatively accurately if one desires to use LUTs designed for L-Log without any exposure correction in post. This means that the

shot should include a gray card in the frame and a waveform monitor to help gauge the exposure.

Figure 7 shows a scene with a gray card placed in it and the corresponding view of a waveform monitor. The exposure in this case is dialed in so that the gray card is exposed at about 44% IRE.

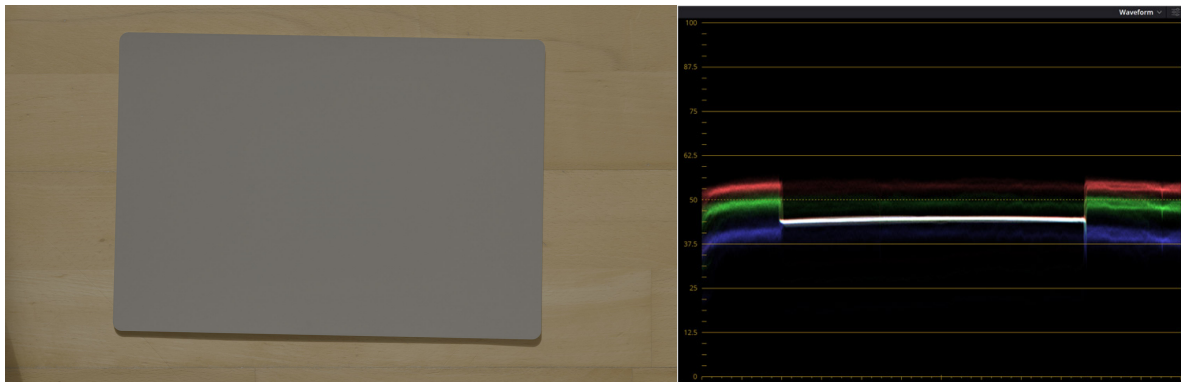


Figure 7: Left: gray card placed in the scene to set exposure; right: waveform monitor view of the scene on the left showing an exposure of the gray card of approximately 44% IRE.

8.2 Exposing for Best Image Quality

In case the goal is to capture the highest dynamic range along with the cleanest shadows with L-Log, the exposure should follow the principle of ETTR (exposure to the right). With this technique the footage is exposed as bright as possible without clipping anything in the highlights that is important to you as the cinematographer.

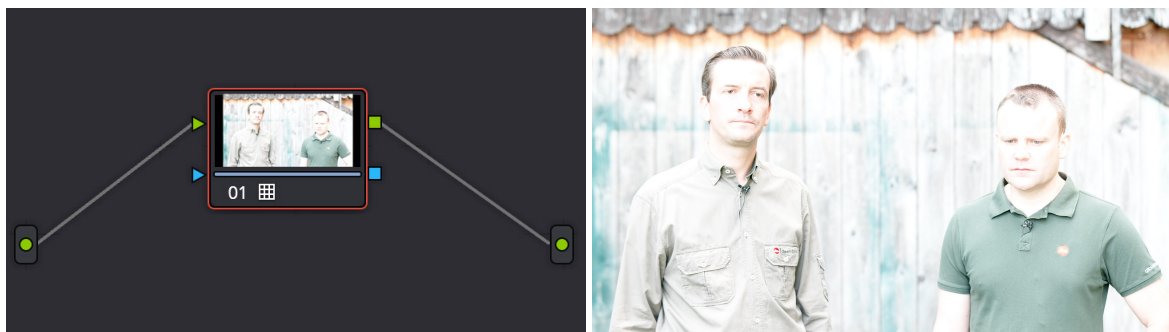


Figure 8: LUT applied to ETTR footage without exposure correction.

When this approach is pursued it is important to remember that an exposure correction is necessary in post if a LUT is used that was designed for L-Log. **Figure 8** shows the result of an L-Log LUT being applied to an image that was recorded brighter than what the LUT is designed to work with. If the LUT is applied before the exposure has been corrected, as shown in **Figure 9**, the result is plagued by posterization issues and thus a very flat impression. This issue is often much more subtle than in the given example, in which case it will typically be most noticeable in faces and show up as flat areas where details and gradients should be visible.

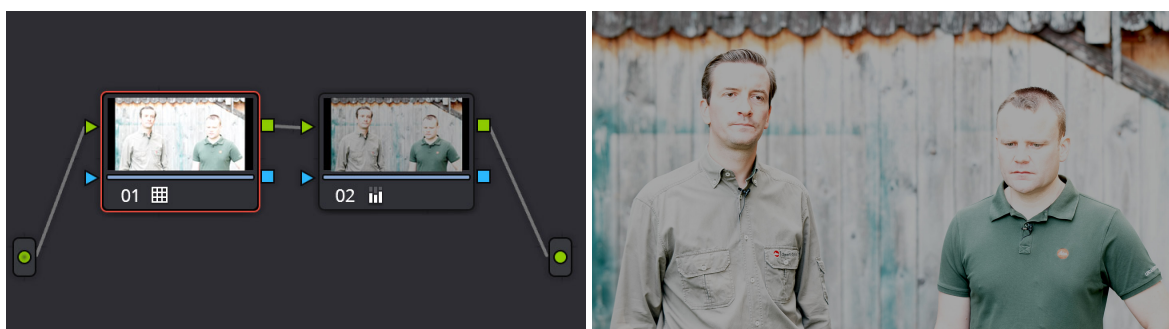


Figure 9: LUT applied to ETTR footage before exposure correction.

The correct handling of this approach is illustrated in [Figure 10](#), where the LUT is applied after the exposure correction to conform the exposure of the footage to that which the LUT was designed for.

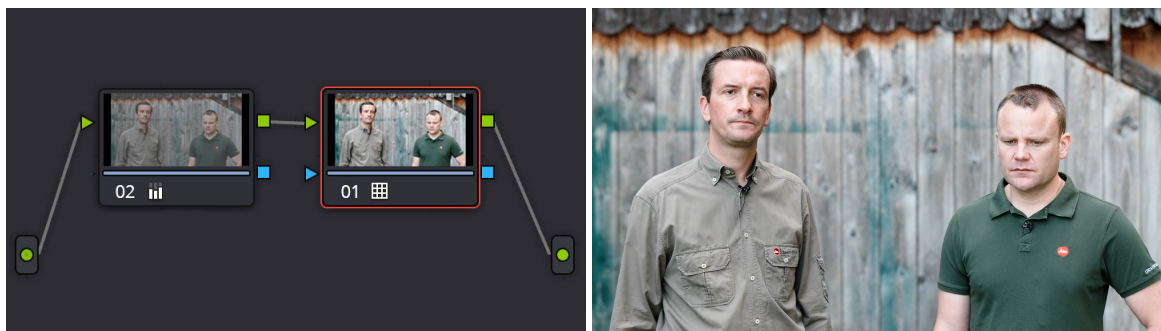


Figure 10: LUT applied to ETTR footage after exposure correction.

9 Editing L-Log Footage

Non-RAW recorded L-Log footage can be edited just like any other log footage as long as the recorded format (container, codec, etc.) is supported by the editing application. Leica provides several LUTs to allow the editor to make use of an out-of-the-box look for both ITU-R BT.709 and BT.2020 workflows. These LUTs can be downloaded from the Leica website.

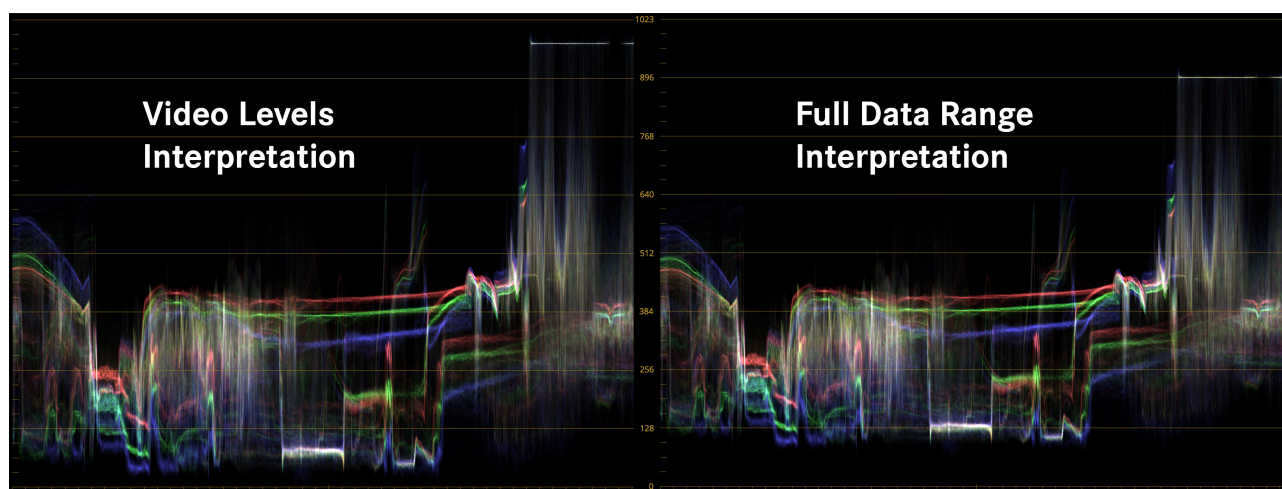


Figure 11: Comparison of L-Log interpretation with video levels and full data range.

L-Log is recorded with **full data range (0 – 1023 for 10 bit) in most cases**. However, in the case of **Apple ProRes internal recording video levels (64 – 940)** are used. Depending on the software that is used to postprocess L-Log it might be necessary to manually change the levels to be able to correctly judge the contrast and colors of the recorded material. By recording a scene with over- and underexposed elements the correct interpretation can be verified with a waveform monitor as illustrated in [Figure 11](#) and the values from [Table 2](#).

Please note that the provided L-Log LUTs were not designed to work with the Leica SL (Typ 601) since it records L-Log in the BT.709 color space.

RAW video recorded with the SL2-S and SL3-S allows for the following changes in editing software that are not available with non-RAW footage. The following overview lists Adobe Premiere Pro (“Premiere”), Apple Final Cut Pro (“FCP”) and Blackmagic Design DaVinci Resolve (“Resolve”) capabilities at the time of writing. These capabilities are subject to change without notice.

Adjustment	Apple ProRes RAW	Blackmagic RAW
White Balancing	FCP	Resolve, Premiere
ISO	FCP	Resolve
Exposure	FCP, Premiere	Resolve, Premiere
Interpretation (Color Space, Gamma)	FCP, Premiere	Resolve, Premiere



Das Wesentliche