



LEICA **AMPLUS 6**

Technical Data.



Designation	Leica Amplus 6 1-6 x 24 i	Leica Amplus 6 3-18 x 44 i
Device type	Riflescope	Riflescope
Scope of delivery	Cleaning tissue, battery, safety instructions	Cleaning tissue, battery, safety instructions
Front lens diameter	24 mm	44 mm
Magnification	1 – 6 x	3 – 18 x
Zoom	6 x	6 x
Field of view at 100 m (min. up to max. magnification)	38 m up to 6.3 m	12,4 m up to 2.1 m
Eye relief	> 3.5 in / 90 mm	> 3.5 in / 90 mm
Exit pupil	12.2 – 4.2 mm	7.3 – 2.4 mm
Parallax-free	100 m	adjustable, 20 m to infinity
Diopter compensation	–3/+2 dpt	–3/+2 dpt
Coating	AquaDura® lens coating	AquaDura® lens coating
Transmission	> 90%	> 90%
Focal plane reticle	2nd focal plane	2nd focal plane
Available reticles	L-4a (Mil)	L-4a (Mil), L-4w (MoA), L-Ballistic 2 (MoA)
Reticle adjustment (100 m)	300x300 cm	330x310 cm (113x106 MoA)
Impact point correction (100 m)	1 cm / 0.1 Mil / 0.1 Mrad	1 cm / 0.1 Mil / 0.1 Mrad or 1/4 MoA
Reticle illumination	dot	dot
Size illuminated dot (10x magnification)	0.6 cm / 100 m	0.6 cm / 100 m
Light levels	10	10
Central tube diameter	30 mm	30 mm
Mounting option	rings	rings
Front lens filter thread	M 28x0.6 mm	M 48x0.6 mm
Length (without sunshade)	10.7 in / 272 mm	12.5 in / 317 mm
Weight	16.9 oz / 480 g	23.6 oz / 670 g
Waterproof	up to 13.1 ft / 4 m water depth (nitrogen-filled)	up to 13.1 ft / 4 m water depth (nitrogen-filled)
Battery	1 x CR 2032	1 x CR 2032
Order No. (Reticle)		
L-4a (Mil)	50 100	--
L-4a with BDC (Mil)	--	50 210
L-4w with BDC (MoA)	--	50 201
L-Ballistic 2 with BDC (MoA)	--	50 213



LEICA **AMPLUS 6**

Technical Data.




Designation	Leica Amplus 6 2.5 - 15 x 50 i	Leica Amplus 6 2.5 - 15 x 56 i
Device type	Riflescope	Riflescope
Scope of delivery	Cleaning tissue, battery, safety instructions	Cleaning tissue, battery, safety instructions
Front lens diameter	50 mm	56 mm
Magnification	2.5 - 15 x	2.5 - 15 x
Zoom	6 x	6 x
Field of view at 100 m (min. up to max. magnification)	15 m up to 2.8 m	14.8 m up to 2.5 m
Eye relief	> 3.54 in / > 90 mm	> 3.54 in / > 90 mm
Exit pupil	11.6-3.4 mm	11.6-3.7 mm
Parallax-free	adjustable, 20 m to infinity	adjustable, 21.9 yds / 20 m to infinity
Diopter compensation	-3/+2 dpt	-3/+2 dpt
Coating	AquaDura® lens coating	AquaDura® lens coating
Transmission	> 90%	> 90%
Focal plane reticle	2nd focal plane	2nd focal plane
Available reticles	L-4a (Mil), L-4w (MoA), L-Ballistic 2 (MoA)	L-4a (Mil), L-4w (MoA), L-Ballistic 2 (MoA)
Reticle adjustment (100 m)	150 x 150 cm	180 x 180 cm
Impact point correction (100 m)	1 cm / 0.1 Mil / 0.1 Mrad or 1/4 MoA	1 cm / 0.1 Mil / 0.1 Mrad or 1/4 MoA
Reticle illumination	dot	dot
Size illuminated dot (10x magnification)	0.6 cm / 100 m	0.6 cm / 100 m
Light levels	10	10
Central tube diameter	30 mm	30 mm
Mounting option	rings	rings
Front lens filter thread	M 55 x 0.6 mm	M 62 x 0.6 mm
Length (without sunshade)	14.9 in / 380 mm	14.9 in / 380 mm
Weight	24.7 oz / 700 g	28.7 oz / 730 g
Waterproof	up to 13.1 ft / 4 m water depth (nitrogen-filled)	up to 13.1 ft / 4 m water depth (nitrogen-filled)
Battery	1 x CR 2032	1 x CR 2032
Order No. (Reticle)		
L-4a (Mil)	50 300	50 400
L-4a with BDC (Mil)	50 310	50 410
L-4w with BDC (MoA)	50 301	50 401
L-Ballistic 2 with BDC (MoA)	50 313	50 413



LEICA **AMPLUS 6**

Dimensions.

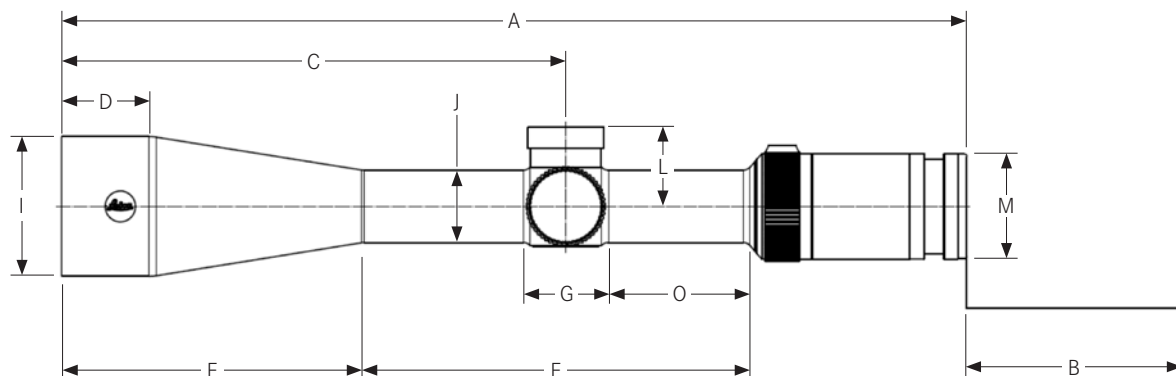

	Leica Amplus 6 1-6 x 24 i	Leica Amplus 6 3-18 x 44 i	Leica Amplus 6 2.5-15 x 50 i	Leica Amplus 6 2.5-15 x 56 i
A	258 mm	320 mm	378 mm	376 mm
B	90 mm	90 mm	90 mm	90 mm
C	98 mm	152 mm	210 mm	208 mm
D	--	38 mm	36.5 mm	42 mm
E	--	85 mm	125 mm	134 mm
F	E+F: 165 mm	150 mm	162 mm	152 mm
G	35 mm	35 mm	35 mm	35 mm
I	30 mm	52 mm	58 mm	65 mm
J	30 mm	30 mm	30 mm	30 mm
K	--	--	--	--
L	33 mm	40 mm	33 mm	33 mm
M	44 mm	44 mm	44 mm	44 mm
N	--	--	--	--
O	50 mm	65 mm	59 mm	59 mm